



Head Office(Sales Office)
11F, GLOBAL R&D CENTER, 477 BUNDANG SUSEO-RO, BUNDANG-GU, SEONGNAM-SI, GYEONGGI-DO, 13553, KOREA

PLEASE CONTACT

2024. FEB

HG130-3 / HG170-3 HG190-3 / HG220-3

With Tier3 / Stage III A Engine Installed



Model	Engine		Transmission	Moldboard	Operating Weight
HG 130-3	Cummins QSB5. 9-C150	113kW / 2,200rpm (150 hp)	Power shift (ZF Technology), 6 Fwd / 3 Rev Gears	3,658 mm	13.5 ton
HG 170-3	Cummins QSB5. 9-C180	133kW / 2,000rpm (180 hp)		3,658 mm	15.2 ton
HG 190-3	Cummins QSB6. 7-C190	142kW / 2,200rpm (190 hp)		4,268 mm	17. ton
HG220-3	Cummins QSB6. 7-C220	163kW / 2,200rpm (220 hp)		4,320 mm	17.2 ton



WHAT'S NEWEST AND BEST

HD Hyundai Construction Equipment strives to build state-of-the-art road machinery that meets various preferences and ensures maximum performance, higher precision, and superior quality.
Take pride in your work with HYUNDAI!

HYUNDAI Motor Grader
HG130-3 / HG170-3
HG190-3 / HG220-3

THE BEST PRODUCTIVITY AND FUEL EFFICIENCY

- High Performance and fuel-efficient engine
- Reliable and proven transmission
- Strong A&U-shaped drawbar and optimal curvature moldboard
- Wide tires (17.5-25 12PR L3)
- Bright and long-lasting LED lights

EASY CONTROL AND OPERATOR'S SAFETY

- Spacious cabin with excellent visibility
- Dual(Lever & Pedal) throttle control
- ROPS Frame **Option**
- Air-conditioner
- Adjustable Control Console
- Suspension Seat
- Beacon Lamp (Amber) **Option**

WORK TOOLS AND ATTACHMENTS

- Durable frame and attachments
- Automatic leveling device **Option**
- Tire 13.00-24-12PR G-2 (for agriculture) **Option**
- Scarifier (Mid, V-type, 11 shanks) **Option**
- Ripper (3 or 5 shanks) **Option**
- Front Dozer **Option**

EASY MAINTENANCE

- Easy access to service areas
- Disconnect switch
- Replaceable wear inserts



* Photo may include optional equipment.

Low Fuel
Consumption



High
Stability



High
Efficiency





High Performance and Low Emission Engine

HYUNDAI MOTOR GRADERS, Cummins turbocharged engine, realizes high productivity and low fuel consumption. Durable mechanical inline fuel injection system provides precise throttle control and thus it delivers higher work speeds with high horsepower.




Reliable and Proven Transmission

ZF-technology powershift transmission is best matched with Cummins engine and is reliable and easy to operate, suited for all types of working conditions.

Drawbar, Circle and Moldboard

The drawbar is composed of strong A & U-shaped frame for strength durability, and precise blading control. The heat-treated rotating ring structure is equipped with four turntable of inner gear guide type, can obtain 360° smooth rotation. The moldboard provides optimal curvature that helps move all soil types quickly and efficiently.

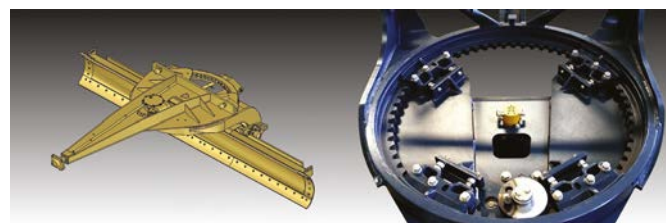

THE BEST PRODUCTIVITY AND FUEL EFFICIENCY



* Photo may include optional equipment.

MAINTENANCE



* Photo may include optional equipment.

Easy access to service areas

Side-open engine hood doors improve accessibility to service points for daily check and replacing filters.




Disconnect switch

For maintenance, the batteries can be disconnected with this switch when repairing the machine or checking batteries.



Replaceable wear inserts

High load-resistant wear inserts are installed between the blade mounting group and moldboard. It can be replaced easily and helps keep components tight for fine grading.

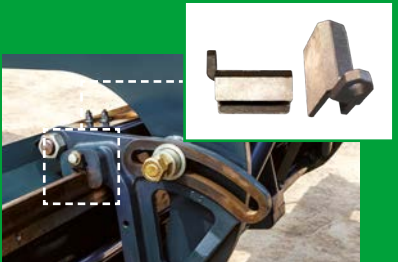

EASY CONTROL AND OPERATOR'S SAFETY

Excellent Visibility

Excellent visibility and layout side pillar boosts operator's confidence and productivity in all grader applications. Well-positioned blade linkage provides an unobstructed view of the moldboard and front tires.

Rear View




Adjustable Control Console

The control console moves back and forth and the operator easily gets in and out of the operator compartment. The steering wheel also tilts to suit the operator's preference.

LED lights

Bright and long-lasting LED lights are applied to Cabin (Front/Rear) and attachment.



Suspension Seat

Adopt high-rigidity suspension seat to enhance vibration absorption.

Air Conditioner

Increase air flow rate by refurbishing the shape of air outlets.



* Photo may include optional equipment.

WORK TOOL AND ATTACHMENTS



* Photo may include optional equipment.

Durable frame and attachments Box-type frame and advanced transmission enable heavy-duty work, while the flexible blade suspension system and articulated frame allow for wide working ranges.

Front Dozer Option

The front Dozer is a front mounted equipment used for spreading materials such as gravel piles or blading at the front of the machine where is difficult to access with the moldboard.



Ripper(Rear) and Scarifier(Mid-mount) Option

Digs up hard material cannot be removed by the moldboard. The V-type scarifier can accommodate up to 11 teeth, the ripper also accommodate 3 or 5 shanks.



Automatic Leveling Device Option

As a 2D control system, Automatic Leveling Device offers precise and reliable height and slope control and a high level of flexibility in the choice of sensors and fields of application.

SPECIFICATIONS

ENGINE				
	HG130-3	HG170-3	HG190-3	HG220-3
Model	QSB5.9-C150	QSB5.9-C180	QSB6.7-C190	QSB6.7-C220
Type	Vertical, in-line, water-cooled, 4 strokes			
Aspiration	turbocharged aftercooling			
No. of cylinders	6	6	6	6
Bore	102 mm	102 mm	114 mm	114 mm
Stroke	120 mm	120 mm	135 mm	135 mm
Piston displacement	5.9 L	5.9 L	8.3 L	8.3 L
Horsepower - Gross	113kW/2,200rpm	133kW/2,000rpm	142kW/2,200rpm	164kW/2,000rpm
Maximum torque	690Nm/1,500rpm	770Nm/1,400rpm	931Nm/1,400rpm	950Nm/1,500rpm
Torque rise	32%	30%	39%	31%
Air cleaner	Dry type	Dry type	Dry type	Dry type
Electrical	28V , 70A	28V,55A	28V , 70A	28V , 70A
Battery	12V*2 ; 900cca	12V*2 ; 900cca	12V*2 ; 900cca	12V*2 ; 900cca

TRANSMISSION AND TORQUE CONVERTER				
	HG130-3	HG170-3	HG190-3	HG220-3
Speed (at rated engine speed)	Forward / Reverse (km/h)			
1st	5.9 / 5.9	5.9 / 5.9	6.5/6.5	6.88/6.88
2nd	8.8 /13.8	10.4 /13.3	11.4/14.6	11.85/15.65
3rd	13.8 / 30.5	13.3 / 27.3	14.6/30	15.65/33.45
4th	21	22.6	24.8	26.68
5th	30.5	27.3	30	33.45
6th	45	44.8	49.2	52.74

TANDEM DRIVE				
	HG130-3	HG170-3	HG190-3	HG220-3
Oscillating welded box section	614*225 mm	614*225 mm	614*225 mm	614*225 mm
Side wall thickness	Inner	22 mm	22 mm	22 mm
	Outer	22 mm	22 mm	22 mm
Whell axle spacing	1,535.4 mm	1,535.4 mm	1,535.4 mm	1,535.4 mm
Tandem oscillation	±13 °	±13 °	±13 °	±13 °

FRONT AXLE				
	HG130-3	HG170-3	HG190-3	HG220-3
Type	Solid bar construction welded steel sections			
Ground clearance at pivot	610 mm	610 mm	610 mm	610 mm
Wheel lean angle, right or left	±17 °	±17 °	±17 °	±17 °
Oscillation, total	32 °	32 °	32 °	32 °

REAR AXLE				
	HG130-3	HG170-3	HG190-3	HG220-3
Alloy steel, heat treated, full floating axle with lock/unlock differential	NO-SPIN differential			

STEERING				
	HG130-3	HG170-3	HG190-3	HG220-3
Hydraulic power steering providing stopped engine steering meeting ISO 5010	Hydraulic power steering			
Minimum turning radius	6.6 mm	7.3 mm	7.3 mm	7.3 mm
Maximum steering range, right or left	49 °	49 °	49 °	49 °
Articulation	±26 °	±26 °	±26 °	±26 °

BRAKES				
	HG130-3	HG170-3	HG190-3	HG220-3
Service brake	Foot operated, hydraulically actuated on four tandem wheels, Wet braking, The max braking torque 18700N.m	Foot operated, hydraulically actuated on four tandem wheels, 3,613m² total braking surface		
Parking brake	Flexible shaft control, drum brake			

FRAME				
	HG130-3	HG170-3	HG190-3	HG220-3
Height	299 mm	302 mm	302 mm	302 mm
Width	280 mm	280 mm	280 mm	280 mm
Side	16 mm	16 mm	16 mm	22 mm
Upper, Lower	16 mm	25 mm	25 mm	25 mm

DRAWBAR				
	HG130-3	HG170-3	HG190-3	HG220-3
	A-shaped, u-section press formed and welded construction for maximum strength with a replacable drawbar ball			
Drawbar frame	200*12 mm	210*16 mm	210*16 mm	210*16 mm

CIRCLE				
	HG130-3	HG170-3	HG190-3	HG220-3
	Four circle support shoes with replaceable wear surface. Circle teeth hardened on front 180°of circle			
Diameter (outside)	1,300 mm	1,410 mm	1,410 mm	1,410 mm
Circle reversing control hydraulic rotation	360 °	360 °	360 °	360 °

MOLDBOARD				
	HG130-3	HG170-3	HG190-3	HG220-3
	Replaceable metal wear inserts, cutting edge and bits. Cutting edge and end bits are hardened.			
Dimensions	3,658*580*18 mm	3,658*580*18 mm	4,268*580*18 mm	4,320*580*22 mm
Arc radius	329 mm	329 mm	329 mm	329 mm
Cutting edge	152*16 mm	152*16 mm	152*16 mm	152*16 mm

BLADE RANGE					
		HG130-3	HG170-3	HG190-3	HG220-3
Circle center shift	Right	525 mm	525 mm	525 mm	525 mm
	Left	530 mm	530 mm	530 mm	530 mm
Moldboard side shift	Right	815 mm	815 mm	965 mm	965 mm
	Left	840 mm	840 mm	965 mm	965 mm
Maximum shoulder reach outside rear tire (frame straight)	Right	1,886 mm	1,886 mm	2,341 mm	2,367 mm
	Left	1,916 mm	1,916 mm	2,346 mm	2,372 mm
Maximum lift above ground		410 mm	450 mm	450 mm	450 mm
Maximum cutting depth		560 mm	535 mm	535 mm	535 mm
Maximum blade angle, right or left		90 °	90 °	90 °	90 °
Blade tip angle		29-77 °	29-77 °	29-77 °	29-77 °

HYDRAULICS				
	HG130-3	HG170-3	HG190-3	HG220-3
	Hydraulic system of double pump and double multi way valve. Priority braking and steering. There are hydraulic locks on the scraper lifting, front wheel tilting, traction frame tilting, power tilting, frame articulation and other oil circuits			
Output (at engine rated prm)	140.8 L/min	99 L/min	99 L/min	99 L/min
Maximum system pressure	17.5 MPa	17.5 MPa	17.5 MPa	17.5 MPa

SPECIFICATIONS

INSTRUMENT					
		HG130-3	HG170-3	HG190-3	HG220-3
Gauge	Standard	Engine coolant temperature, fuel level, torque converter oil temperature			
Warning lights / indicator	Standard	Battery charge,directional indicator, engine oil pressure, parking brake			


CAPACITIES (REFILLING)				
	HG130-3	HG170-3	HG190-3	HG220-3
Fuel tank	370 L	370 L	370 L	370 L
Cooling system	24 L	29 L	36.5 L	36.5 L
Crank case	17 L	17 L	27 L	27 L
Transmission	28 L	28 L	28 L	28 L
Final drive	18 L	18 L	18 L	18 L
Tandem housing (each)	45*2 L	45*2 L	45*2 L	45*2 L
Hydraulic system	65 L	65 L	65 L	65 L
Circle reverse housing	4 L	4 L	4 L	4 L

OPERATING WEIGHT (APPROXIMATE)					
		HG130-3	HG170-3	HG190-3	HG220-3
Includes lubricants, coolant, full fuel tank	Total	12,000 kg	14,500 kg	15,600 kg	15,800 kg
	On rear wheels	8,400 kg	10,150 kg	10,920 kg	11,060 kg
	On front wheels	3,600 kg	4,350 kg	4,680 kg	4,740 kg
With front mounted scarifier	Total	12,650 kg	15,150 kg	16,250 kg	16,450 kg
	On rear wheels	8,400 kg	10,150 kg	10,920 kg	11,060 kg
	On front wheels	4,250 kg	5,000 kg	5,330 kg	5,390 kg
With rear mounted ripper and front push plate	Total	13,000 kg	15,150 kg	15,541kg	15,741kg
	On rear wheels	9,400 kg	10,800 kg	10,879kg	11,019kg
	On front wheels	3,600 kg	4,350 kg	4,662kg	4,722kg

SCARIFIER (OPTIONAL)					
		HG130-3	HG170-3	HG190-3	HG220-3
Middle, V-type	Working width	1,325 mm	1,325 mm	1,325 mm	1,325 mm
	Scarifying depth, maximum	210 mm	210 mm	210 mm	210 mm
	Scarifier shank holders	11	11	11	11
	Scarifier shank holders spacing	130 mm	130 mm	130 mm	130 mm
Rear	Working width		2,161 mm	2,161 mm	2,161 mm
	Scarifying depth, maximum		249 mm	249 mm	249 mm
	Scarifier shank holders		9	9	9
	Scarifier shank holders spacing		267 mm	267 mm	267 mm

RIPPER (OPTIONAL)				
	HG130-3	HG170-3	HG190-3	HG220-3
Ripping depth, maximum	350 mm	436 mm	436 mm	436 mm
Ripper shank holders	3-teeth (standard) 5-teeth (optional)	3-teeth (standard) 5-teeth (optional)	3-teeth (standard) 5-teeth (optional)	3-teeth (standard) 5-teeth (optional)
Ripper shank holder spacing	455 mm	534 mm	534 mm	534 mm
Machine length increase, beam raised	1,000 mm	1,000 mm	1,000 mm	1,000 mm

DIMENSIONS

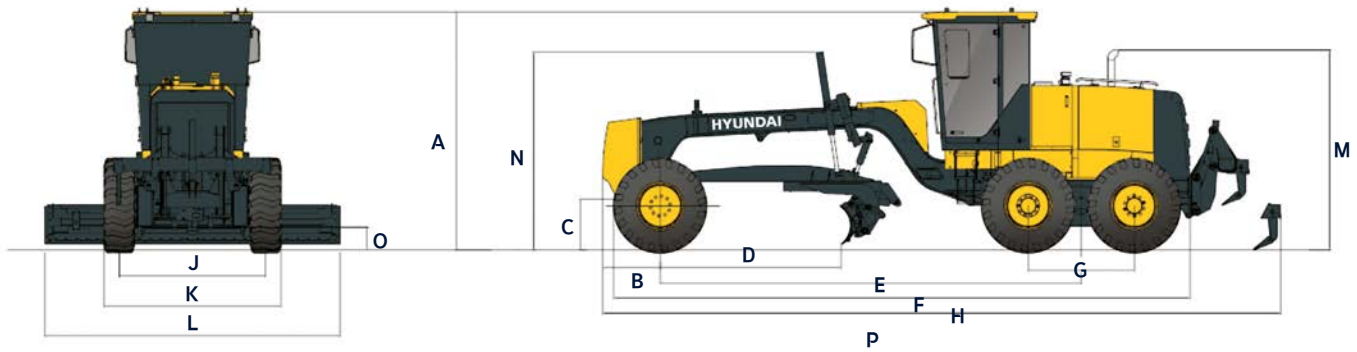

Item	Description	HG130-3	HG170-3	HG190-3	HG220-3
A	Height to Top of Non-ROPS Cabin	3,465 mm	3,420 mm	3,420 mm	3,420 mm
	Height to Top of ROPS Frame	3,632 mm	3,590 mm	3,604 mm	3,604 mm
B	Center of Front Axle to counterweight	675 mm	833 mm	963 mm	963 mm
C	Ground Clearance to Center Front Axle	869 mm	725 mm	714 mm	714 mm
D	Length of Front Axle to Moldboard	2,470 mm	2,600 mm	2,600 mm	2,600 mm
E	Length of Front Axle to Mid Tandem	5,780 mm	6,100 mm	6,100 mm	6,100 mm
F	Length of Front Tire to Rear of Machine	8,125 mm	8,353 mm	8,353 mm	8,653 mm
G	Length of Between Tandem Axles	1,535 mm	1,535 mm	1,535 mm	1,535 mm
H	Length of Between Counterweight to Ripper	9,440 mm	9,670 mm	9,820 mm	9,820 mm
J	Width of Tire Center Lines	2,120 mm	2,120 mm	2,120 mm	2,120 mm
K	Width of Outside Tires	2,600 mm	2,600 mm	2,600 mm	2,600 mm
L	Width of Moldboard	3,658 mm	3,658 mm	4,268 mm	4,320 mm
M	Height to Exhaust Stack	2,582 mm	2,863 mm	2,846 mm	2,747 mm
N	Height to Top of Cylinders	2,793 mm	2,833 mm	2,908 mm	2,908 mm
O	Ground Clearance to Trans. Case	339 mm	339 mm	339 mm	339 mm
P	Standard, F-CWT & R-CWT	8,290 mm	8,820 mm	8,950 mm	8,950 mm